


Current Rating: 3 AMP
Insulation Resistance: 1000MΩ Min.
Dielectric Voltage: 1000V AC for one minute
Contact Resistance: 30mΩ Max.
Operation Temperature: -40°C to +105°C

Insulator: PBT, UL94V-0
Contact Pin: Copper Alloy


5 D I N R L 3 X X M - X X X X W A B 0 1

A: Tray

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRL3AXM-96 ***	96	2.54	A B C	
5DINRL3BXM-64 ***	64		A B -	
5DINRL3CXM-64 ***	64		A - C	
5DINRL3DXM-32 ***	32		A - -	
5DINRL3EXM-48 ***	48	5.08	A B C	
5DINRL3FXM-32 ***	32		A B -	
5DINRL3GXM-32 ***	32		A - C	
5DINRL3HXM-16 ***	16		A - -	

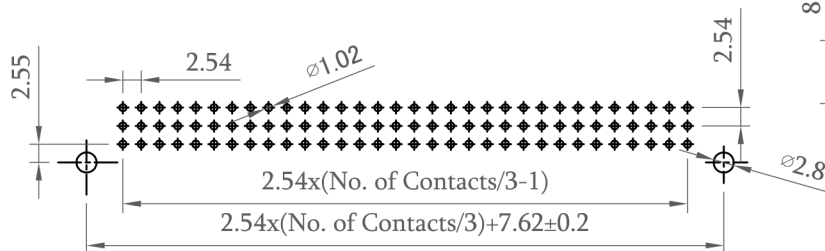

 Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

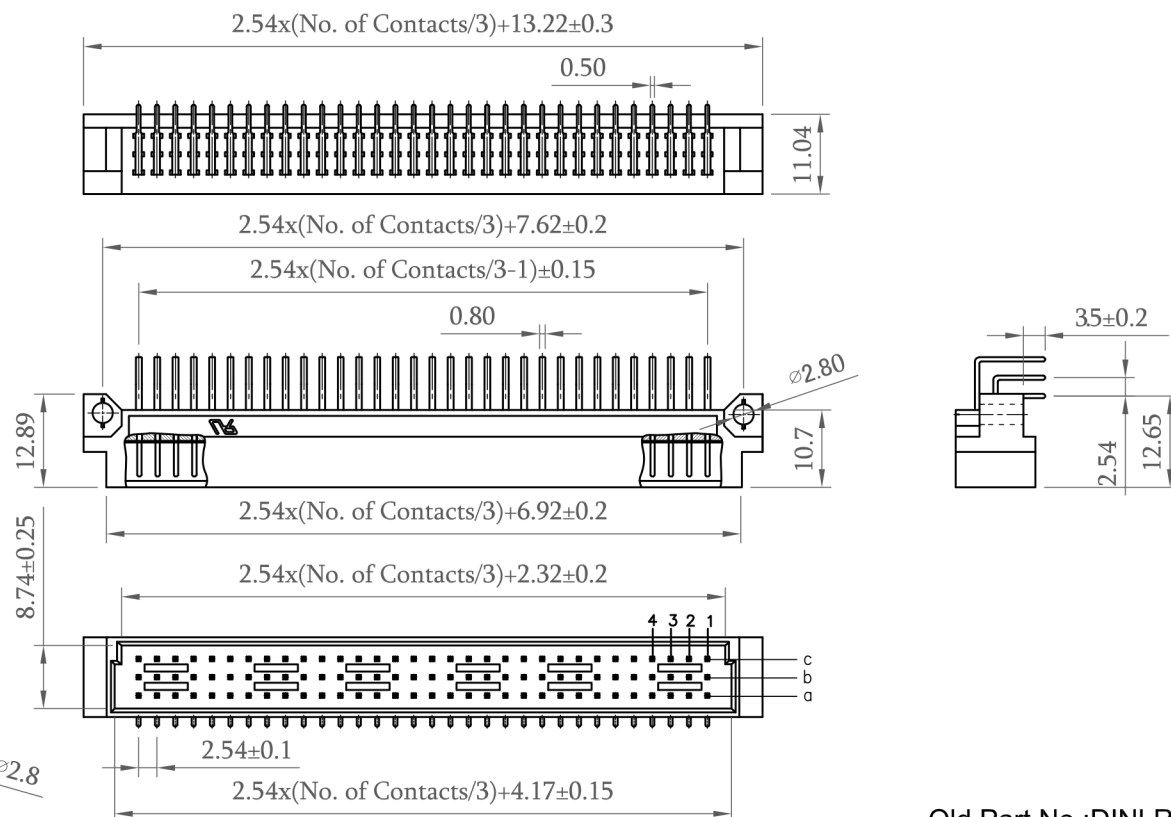

Old Part No.:DINLR-M3XX-L

 C x1	Add the PCB Layout.	Gary	2018/08/03
 B x1	Revise the Table 1	Roy	2018/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	DIN 41612 3-R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5DINRL3XXM-XXXXWAB01			繪圖 DRAWN	Roy 2017/02/07	
圖號 DRAWING NO.	GN087-RL422	版本 REV.	C	核對 CHECKED	Josh 2018/08/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/03	
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		