

ORDER INFORMATION

SPECIFICATIONS

Current Rating: 3 AMP

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1000V AC/DC

Operation Temperature: -40°C to +105°C

MATERIAL

Contact Pin: Brass

Insulator: PBT, UL94V-0

5 D I N R S 3 X



X

M

-

X

X

X

X

W

A

B

0

1

3:Triple Row

Pitch / Row
See Table 1

1:With Lock
N:W/O Lock






M:Male

Pin No.
See Table 1

G0:Gold Flash
S0:Selective Au
SB:10u"
SF:15u"
SD:30u"
T0:Tin Plated

W: Natural

A: Tray

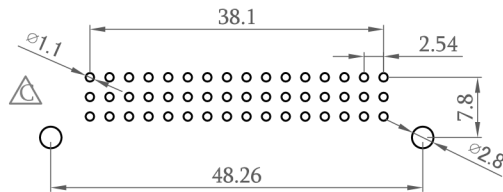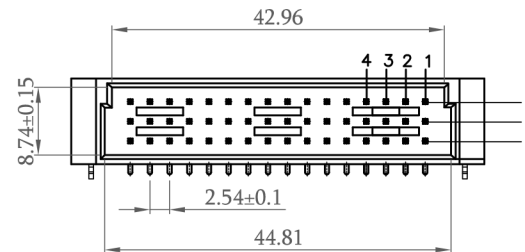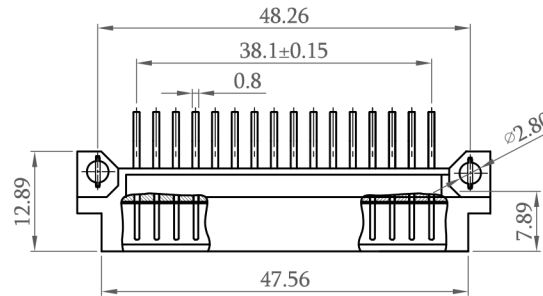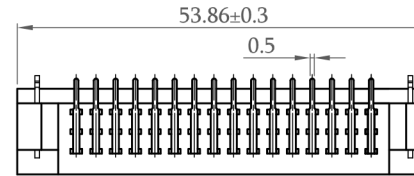

P.C.B. LAYOUT
TOLERANCE: ±0.1

Old Part No.:DINSR-M31XXXWX-L

△x1	Revise the Table 1	Roy	2018/05/10
△x3	Add B, F Type, P.C.B. Layout.	Gary	2017/09/22
△x3	Revise the P/N:5DINRS3A1M-XXXXWAB01->5DINRS3XXM-XXXXWAB01	Roy	2016/08/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob:+86 136 3177 3595	品名 TITLE	DIN 41612 3-R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	△5DINRS3XXM-XXXXWAB01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN087-GA644	版本 REV.	D	核對 CHECKED	Jason 2018/05/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/10	
	公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		