SPECIFICATION

Current Rating: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resisitance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PBT, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5 D I N R L 3 X X F - X X X X W A B 0 1

3:Triple Row	Pitch / Row See Table 1	N:W/O Lock 1:With Lock	F:Female	Pin No. See Table 1	S0: Selective SA: Selective 5u" SB: Selective 10u" SF: Selective 15u" SD: Selective 30u" G0: Gold Flash T0: Tin Plated	W: Natural	A: Tray

Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRL3AXF-96 ***	96	2.54	A B C	
5DINRL3BXF-64 ***	64		A B -	
5DINRL3CXF-32 ***	64		A - C	
5DINRL3DXF-32 ***	32		A - -	
5DINRL3EXF-48 ***	48	5.08	A B C	
5DINRL3FXF-32 ***	32		A B -	
5DINRL3GXF-32 ***	32		A - C	
5DINRL3HXF-16 ***	16		A - -	

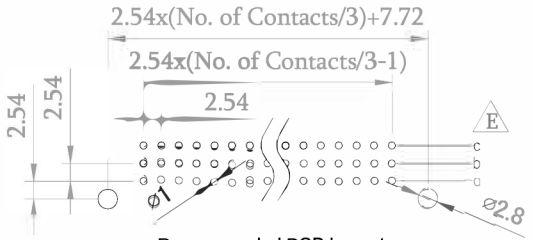

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

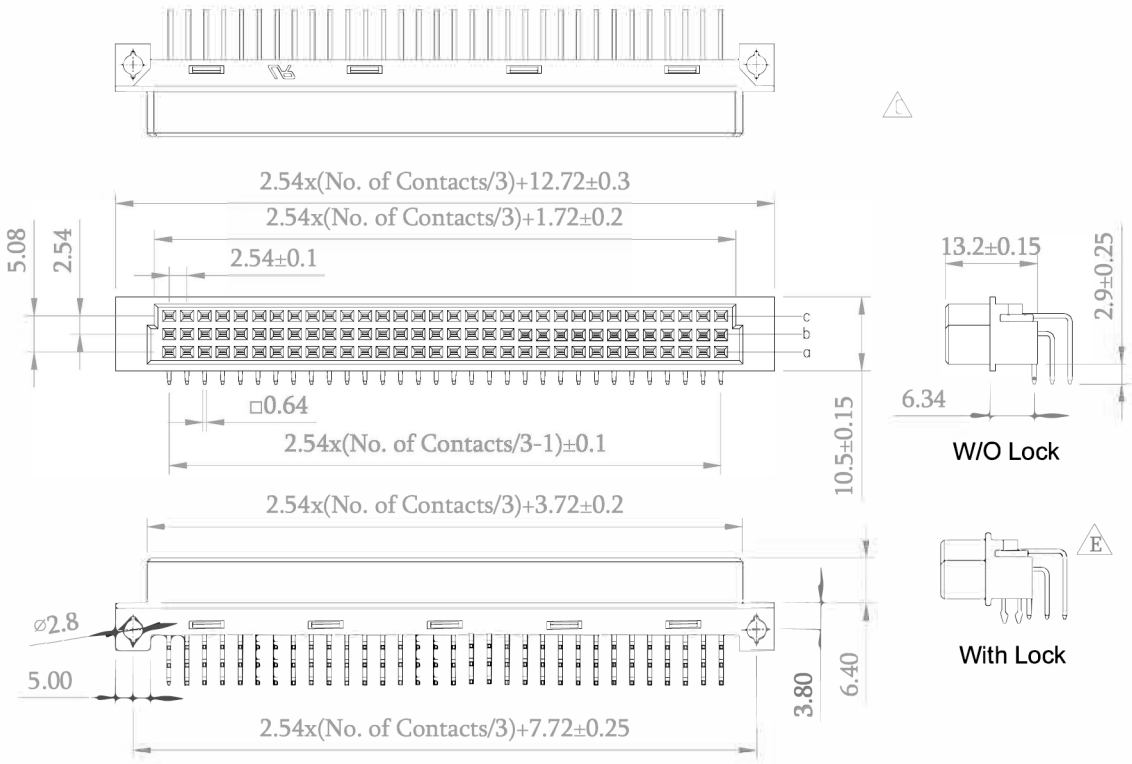

Old Part No.:DINLR-F3XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
E x2	Add drawings of P.C.B. Layout and With Lock.	Gary	2018/05/24
D x1	Revise the Table 1	Roy	2018/05/08
C x4	Revise the drawing	Roy	2016/10/13
B	Revise the drawing	Roy	2016/04/18

Bessure
www.bessure.com Mob:+86 136 3177 3595

品名 TITLE	DIN 41612 3-R R/A DIP TYPE			頁數 Page	1/1
品號 PART NO.	5DINRL3XXF-XXXXWAB01			繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN087-RR459	版本 REV.	E	核對 CHECKED	Josh 2018/05/24
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/24
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	