

SPECIFICATIONS

Current Rating: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PBT, UL94V-0
Contact Pin: Brass

ORDER INFORMATION

5 D I N S S 3 A

S: Short Body

3: Triple Rows

A M - 4 8 S 0 W A B 0 1





M: Male

Pin No.

S0: Selective Au*

W: Natural

A: Tray

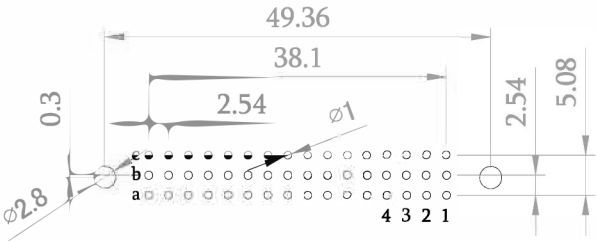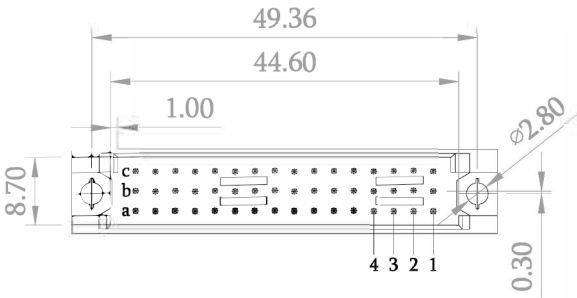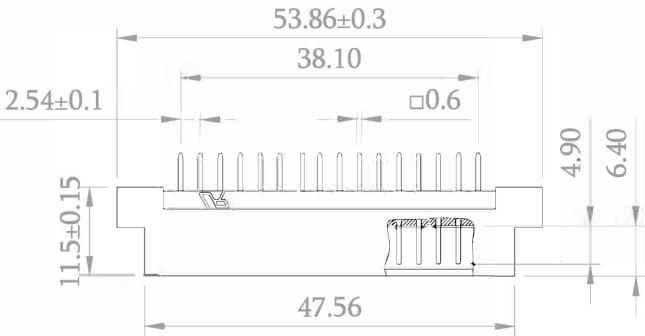

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob: +86 136 3177 3596	品名 TITLE	DIN 41612 SHORT BODY MALE 3-R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5DINSS3AAM-48S0WAB01				繪圖 DRAWN	Gary
	圖號 DRAWING NO.	GN175-GB256				核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N					承認 APPROVED	Jason
	公差 TOLERANCE	.X ±0.30 .XX ±0.20				單位 UNIT	mm
		版本 REV.	A	比例 SCALE	None	THIRD ANGLE PROJECTION	