SPECIFICATION

Current Rating:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:PBT, UL94V-0
Contact Pin:Copper Alloy


ORDER INFORMATION

5	D	I	N	R	L	2	X		X	M	-	X	X	X	X	W	A	B	0	1

- 2: Dual Row
- Pitch / Row: See Table 1
- N: W/O Lock; 1: With Lock
- M: Male
- Pin No.: See Table 1
- S0: Selective; SF: Selective 15u"; SD: Selective 30u"; SB: Selective 10u"; T0: Tin Plated; G0: Gold Flash
- W: Natural
- A: Tray

Ⓑ Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRL2BNM-64***	64	2.54	A B	4321 B A
5DINRL2DNM-32***	32		A -	4321 B A
5DINRL2FNM-32***	32	5.08	A B	4321 B A
5DINRL2HNM-16***	16		A -	4321 B A

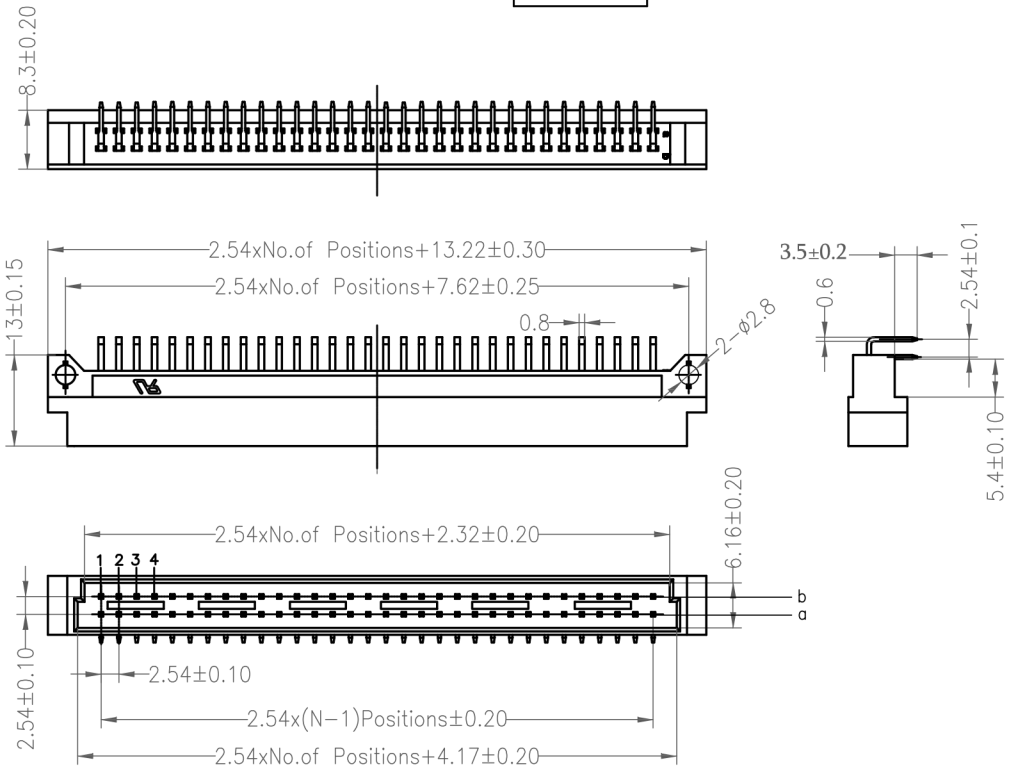

Old P/N:DINLR-M2XXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ⓑx1	Revise the Table 1	Roy	2018/05/08

Bessure www.bessure.com Mob:+86 136 3177 3595

品名 TITLE	DIN 41612 2-R R/A DIP TYPE			頁數 Page	1/1
品號 PART NO.	5DINRL2XXM-XXXXWAB01			繪圖 DRAWN	Roy 2016/10/11
圖號 DRAWING NO.	GN087-RR456	版本 REV.	B	核對 CHECKED	Josh 2018/05/08
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/08
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	