

SPECIFICATIONS

Current Rating: 2.0A AC, DC
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insultor: PBT, UL94V-0
Contact Pin: Brass

ORDER INFORMATION



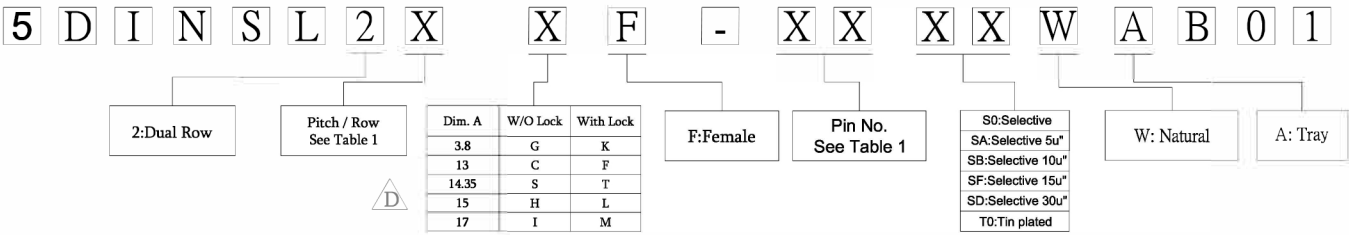


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINSL2BXF-64 ***	64	2.54	A B	
5DINSL2DXF-32 ***	32		A -	
5DINSL2FXF-32 ***	32	5.08	A B	
5DINSL2HXF-16 ***	16		A -	

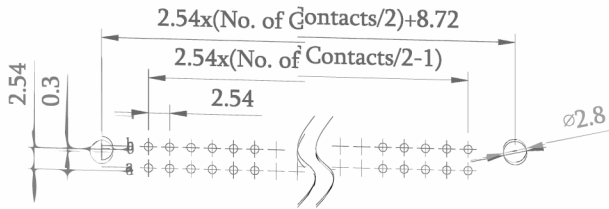

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

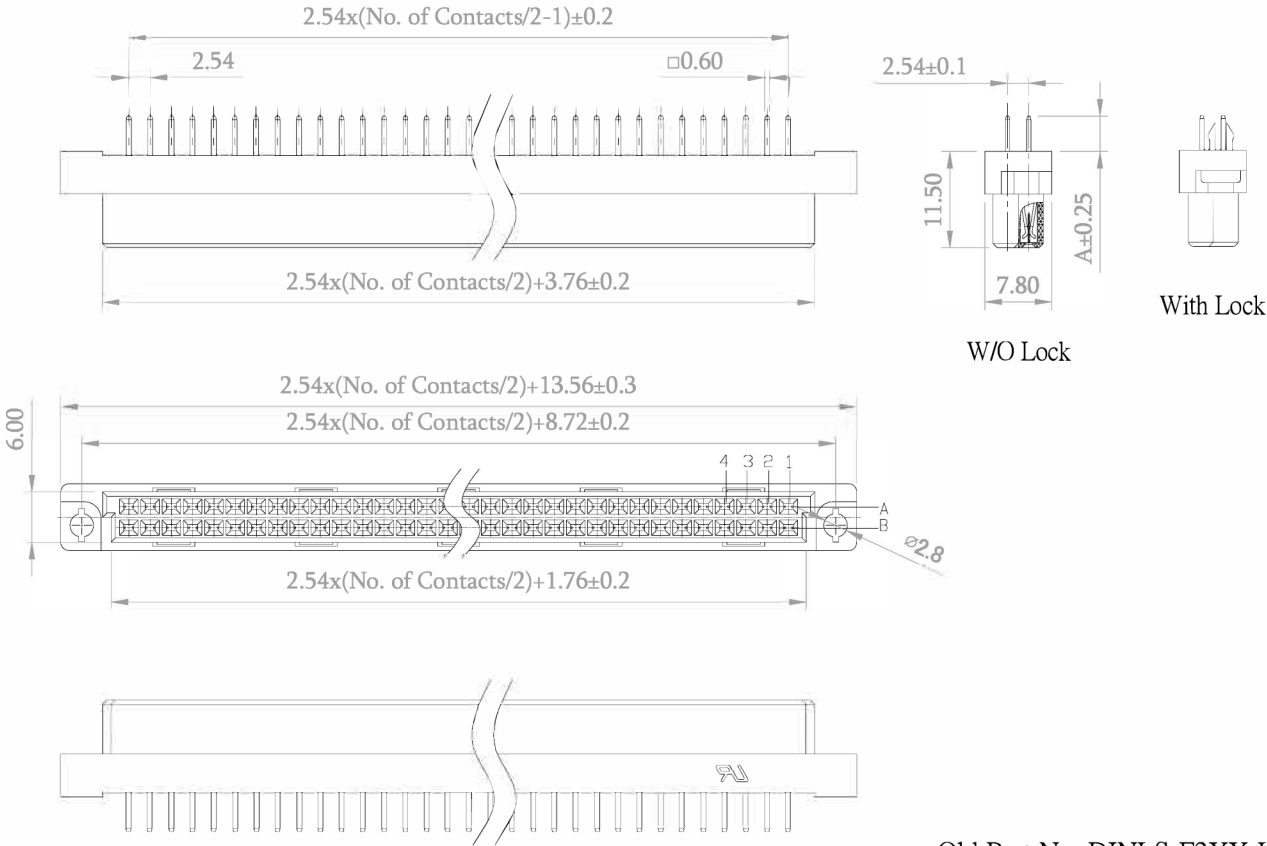

Old Part No.:DINLS-F2XX-L

	x1	Add options: C, F, S, T, H, L, I, M.	Gary	2018/08/30
	x1	Revise the Table 1	Roy	2018/05/08
		Revise the Drawing	Jeff	2016/06/17
REV.		ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob:+86 136 3177 3595	品名 TITLE	DIN 41612 D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5DINSL2XXF-XXXXWAB01				繪圖 DRAWN	Roy 2016/04/07
	圖號 DRAWING NO.	GN087-RR462				核對 CHECKED	Josh 2018/08/30
	客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/08/30
	公差 TOLERANCE	.X ±0.30 .XX ±0.20				單位 UNIT	mm
		版本 REV.	D	比例 SCALE	None	THIRD ANGLE PROJECTION	