

SPECIFICATION

Current Rating: 3 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: PBT, UL94V-0

Contact Pin: Brass

ORDER INFORMATION

5 D I N R S 2 X

X M

- X X

X X W

A B 0 1

2: Dual Row

Pitch / Row
See Table 1

N: W/O Lock
1: With Lock

M: Male

Pin No.
See Table 1




G0: Gold Flash
GA: Au 5u"
GB: Au 10u"
GF: Au 15u"
GD: Au 30u"
T0: Tin plated

W: Natural


A: Tray

Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRS2BXM-64 ***	64	2.54	A B	
5DINRS2FXM-32 ***	32	5.08	A B	
5DINRS2BXM-32 ***	32	2.54	A B	

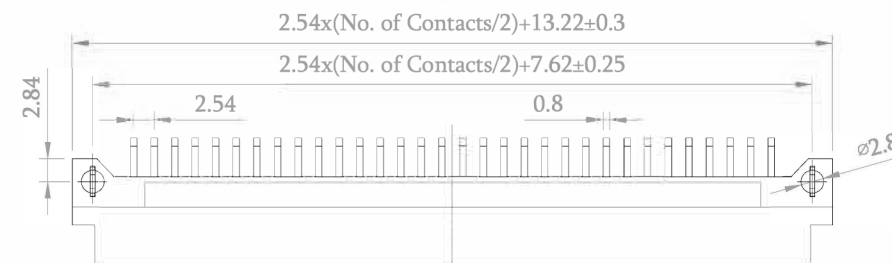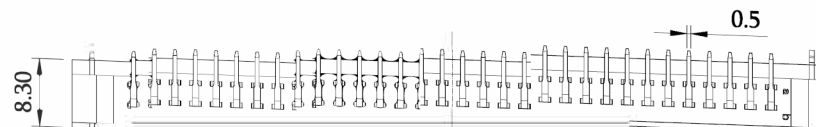

With Lock
5DINRS2X1M-XXXXWAB01

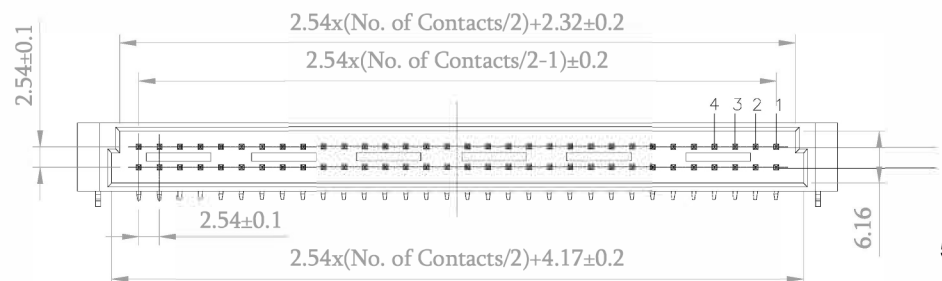

W/O Lock
5DINRS2XNM-XXXXWAB01

Old Part No.: DINSR-M2XXXXW2-L

△x3	ECN NO.: 180709, Add an option: N: W/O Lock, revise a dimension: 3.2 -> 2.9.	Gary	2018/08/02
△x1	Add an option: pitch=2.54, 32Pin.	Gary	2018/06/28
△x1	Revise the Table 1	Roy	2018/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob: +86 136 3177 3595	品名 TITLE	DIN 41612 2-R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5DINRS2XXM-XXXXWAB01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN087-RR460				核對 CHECKED	Josh 2018/08/02
	客戶品號 CUSTOMER P/N					承認 APPROVED	Jeff 2018/08/02
	公差 TOLERANCE	.X ±0.30 .XX ±0.20				單位 UNIT	mm
						THIRD ANGLE PROJECTION	