

SPECIFICATIONS

Current Rating: 3A
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator:PBT,UL94V-0
Contact: Brass

ORDER INFORMATION



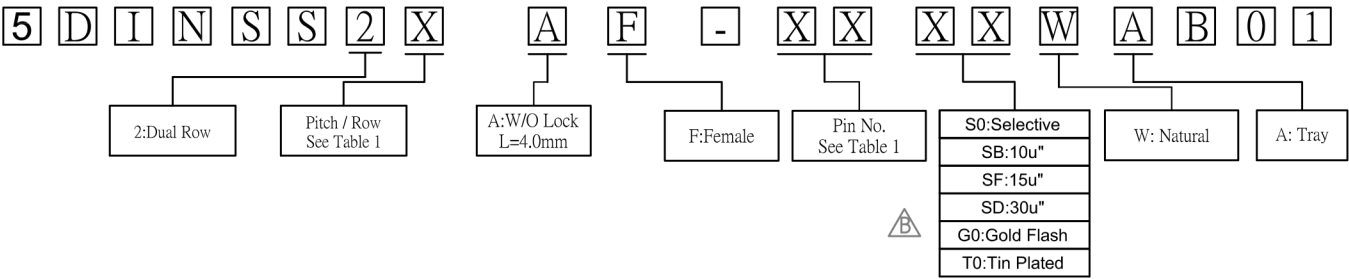


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINSS2BAF-32 ***	32	2.54	A B	
5DINSS2DAF-16 ***	16		A -	
5DINSS2FAF-16 ***	16	5.08	A B	
5DINSS2HAF-08 ***	8		A -	

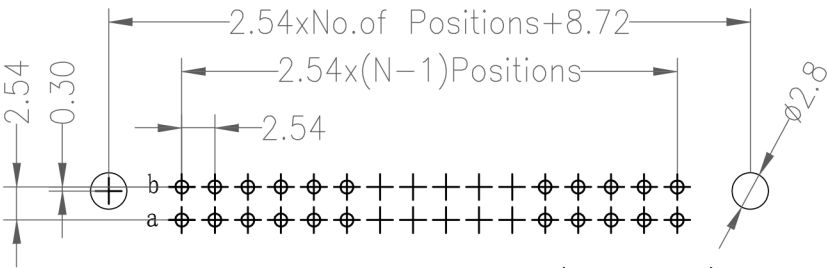

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

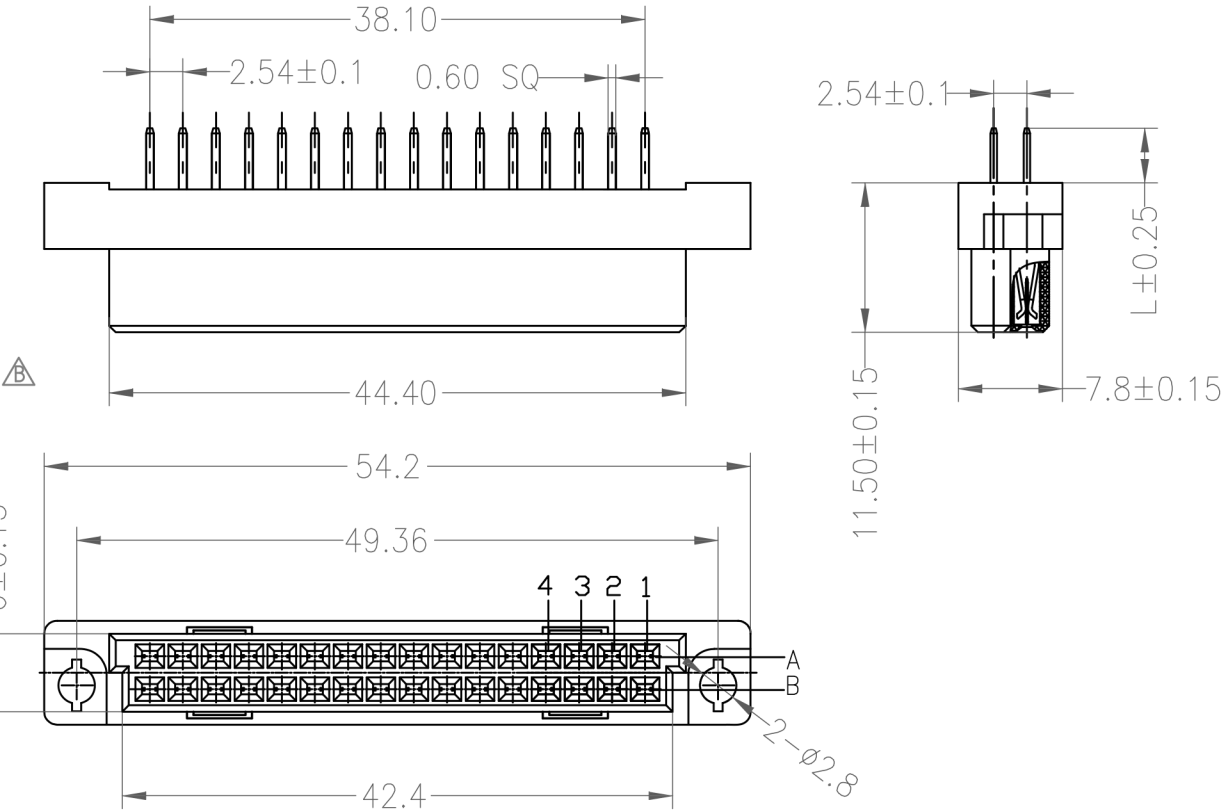

Old Part No.:DINSS-F2XXX-L

	Revise the Table 1	Roy	2018/05/10
	Revise the drawing	Roy	2016/09/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	DIN 41612 2-R V/T DIP TYPE				頁數 Page	1/2
品號 PART NO.	5DINSS2XAF-XXXXWAB01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN087-RL947				核對 CHECKED	Josh 2018/05/10
客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/05/10
公差 TOLERANCE	.X ±0.30 .XX ±0.20				單位 mm	THIRD ANGLE PROJECTION