

SPECIFICATIONS

Rated Current:2.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

ORDER INFORMATION





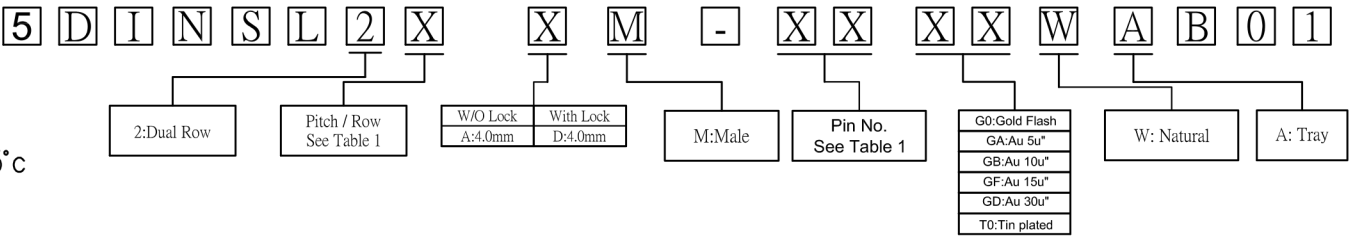


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINSL2BXM-64 ***	64	2.54	A B	
5DINSL2FXM-32 ***	32	5.08	A B	

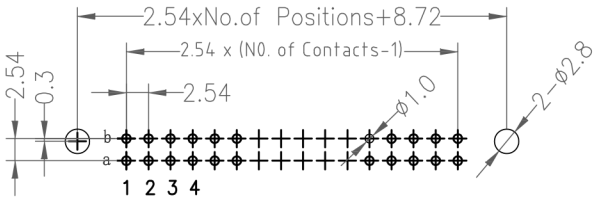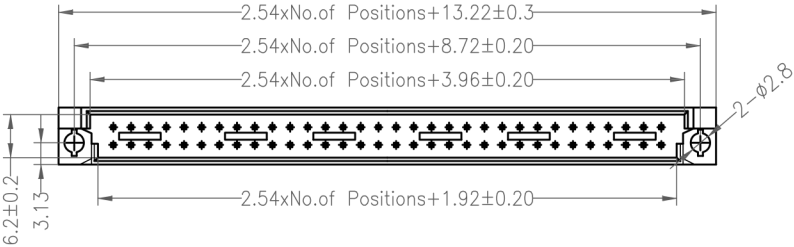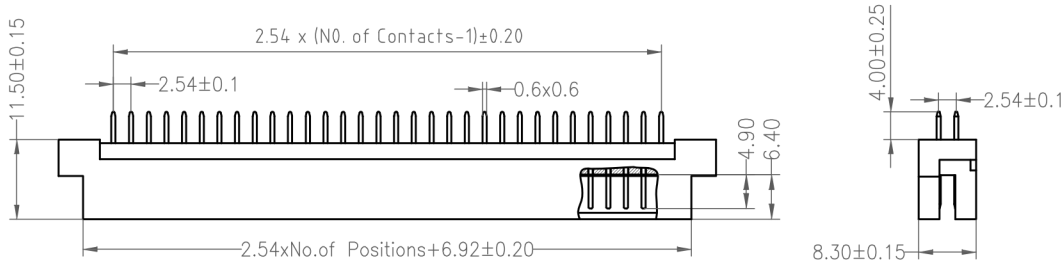

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old Part No.:DINLS-M2XX-L

B x1	Revise the Table 1	Roy	2018/05/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob:+86 136 3177 3595	品名 TITLE	DIN 41612 2-R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5DINSL2XXM-XXXXWAB01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GN087-RR463				核對 CHECKED	Josh 2018/05/10
	客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/05/10
	公差 TOLERANCE	.X ±0.30 .XX ±0.20				單位 UNIT	mm
						THIRD ANGLE PROJECTION	