

SPECIFICATIONS

Current Rating: 3A
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator:PBT,UL94V-0
Contact: Brass

ORDER INFORMATION



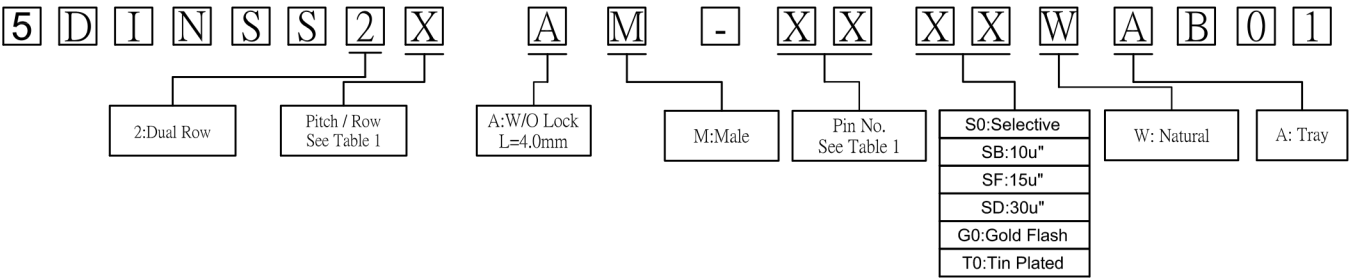


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINSS2BAM-20 ***	20	2.54	A B	
5DINSS2DAM-10 ***	10		A -	
5DINSS2FAM-10 ***	10	5.08	A B	
5DINSS2HAM-05 ***	5		A -	

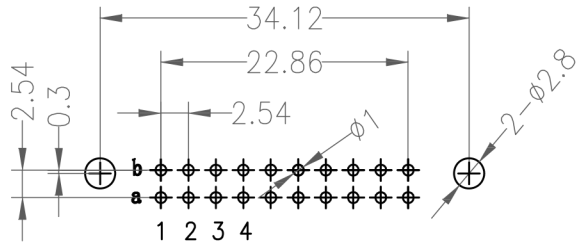

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

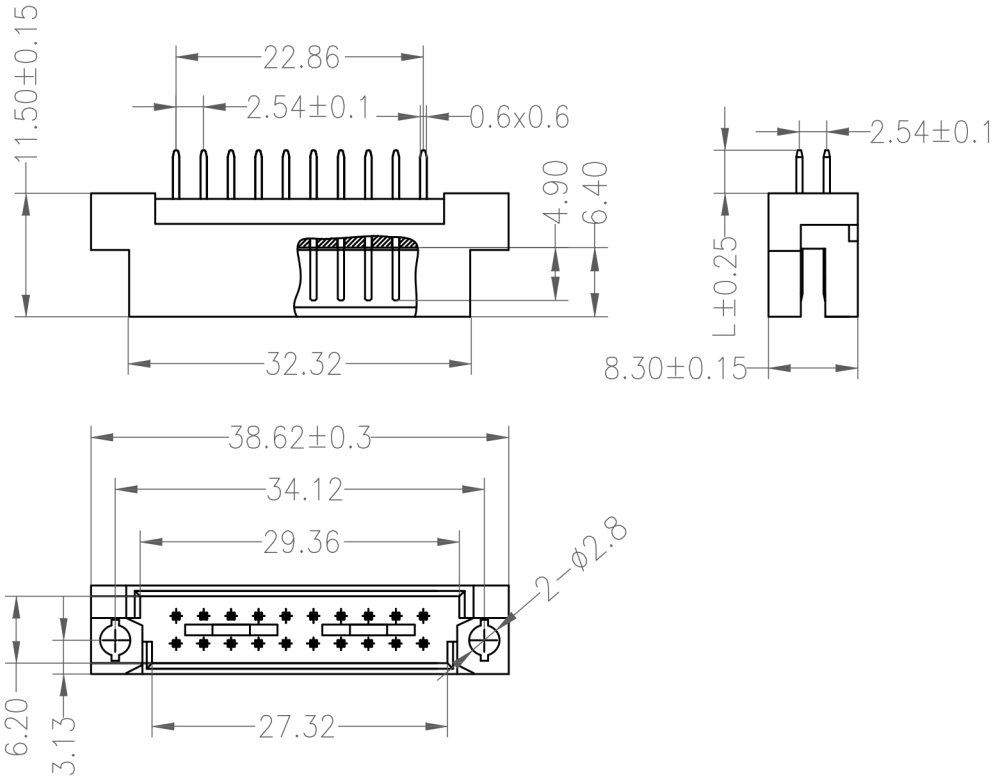

B x1	Revise the Table 1	Roy	2018/05/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob:+86 136 3177 3596	品名 TITLE	DIN 41612 2-R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5DINSS2XAM-XXXXWAB01				繪圖 DRAWN	Roy 2017/08/24
	圖號 DRAWING NO.	GN087-RL948		版本 REV.	B	核對 CHECKED	Josh 2018/05/10
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/05/10
	公差 TOLERANCE	.X ±0.30 .XX ±0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	