

Current Rating: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: P.B.T, UL 94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION





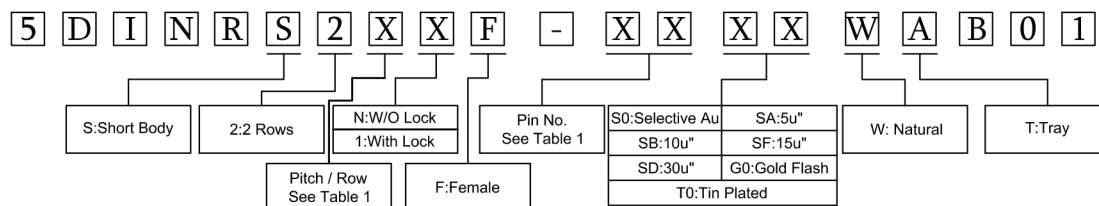


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRS2BXF-20 ***	20	2.54	A B	
5DINRS2DXF-10 ***	10		A -	
5DINRS2FXF-10 ***	10	5.08	A B	
5DINRS2HXF-05 ***	5		A -	

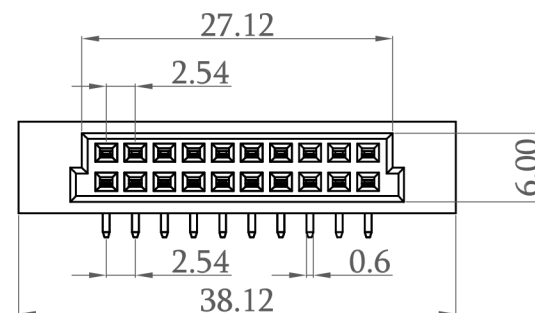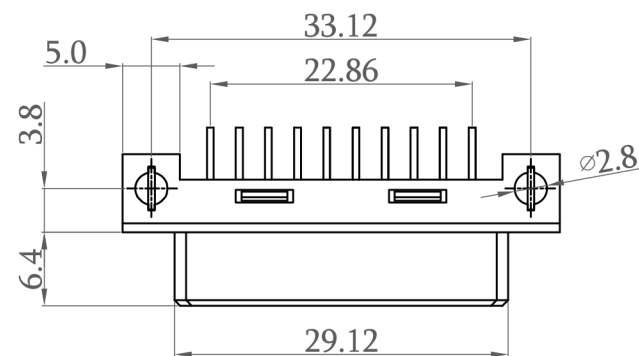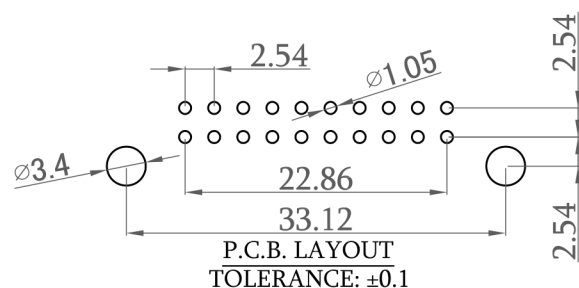

 B.x1	Revise the Table 1	Roy	2018/05/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 www.bessure.com Mob: +86 136 3177 3595	品名 TITLE	DIN 41612 2-R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5DINRS2XXF-XXXXWAB01			繪圖 DRAWN	Gary 2017/08/16	
	圖號 DRAWING NO.	GN087-GA543	版本 REV.	B	核對 CHECKED	Josh 2018/05/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/09	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		