

SPECIFICATION

Current Rating:3.0AMP
Insulation Resistance: 1000MΩ Min. at DC 500V
Dielectric Withstanding Voltage: 1000V AC/minute
Contact Resistance: 30mΩ Max. at DC 100mA
Temperature Range: -40°C to +105°C

MATERIAL

Material: P.B.T , UL94V-0
Terminal: Phosphor Bronze

ORDER INFORMATION


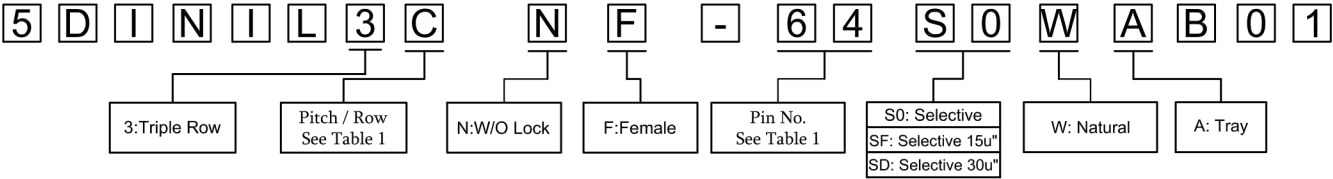


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINIL3CNF-64 ***	64	2.54	A - C	

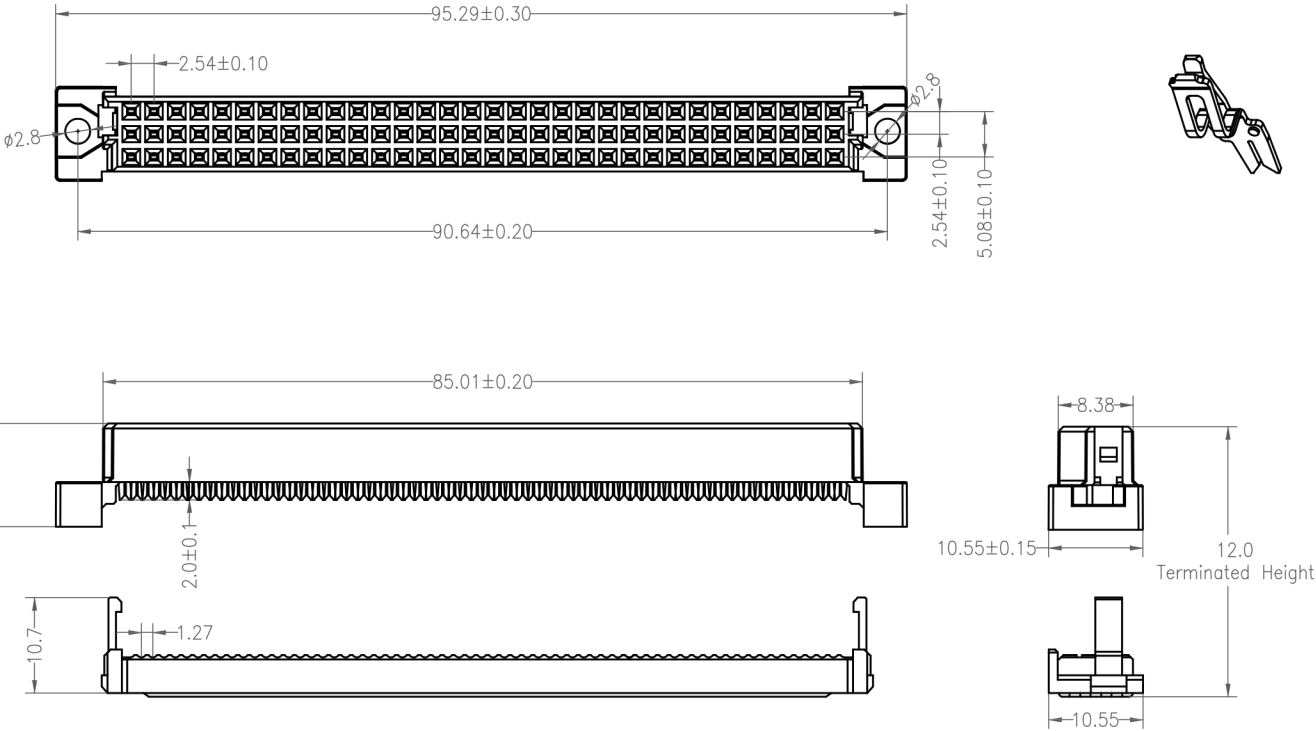

Old Part No.:DINLI-F364-L

	Revise the Table 1	Roy	2018/05/08
	Revise the P/N:5DINIL3ANF-96S0WAB01->5DINIL3CNF-64S0WAB01	Roy	2016/11/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	DIN 41612 3-R IDC TYPE				頁數 Page	1/1
品號 PART NO.	5DINIL3CNF-64S0WAB01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN087-RR453	版本 REV.	C	核對 CHECKED	Josh 2018/05/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/08	
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		