

SPECIFICATION

Current Rate:3 AMP
Insulation Resistance:1000M ΩMin.
Contact Resistance:30m ΩMax.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C
Max.Processing Temp:180°C for 30-60 seconds(200°C for 10 seconds)

MATERIAL

Insulator:Polyester,UL 94V-0 ©Standard:P.B.T
Contact Pin:Phosphor Bronze

ORDER INFORMATION








Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINIS3CNF-32 ***	32	2.54	A - C	

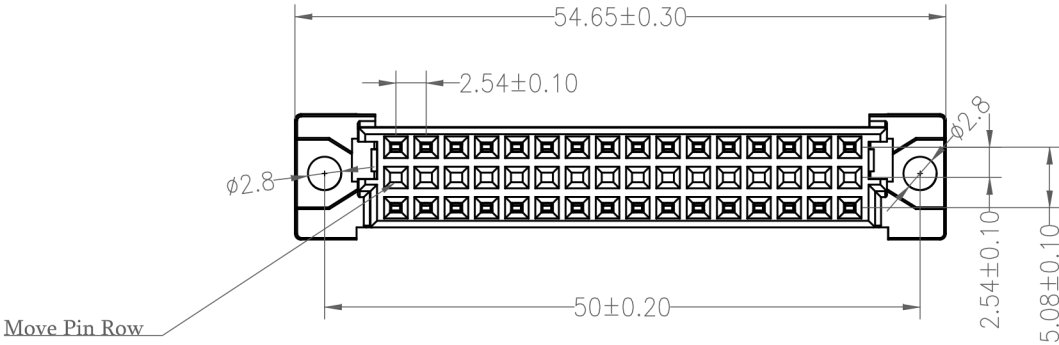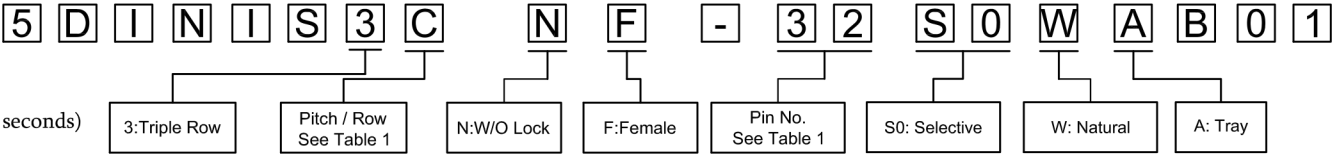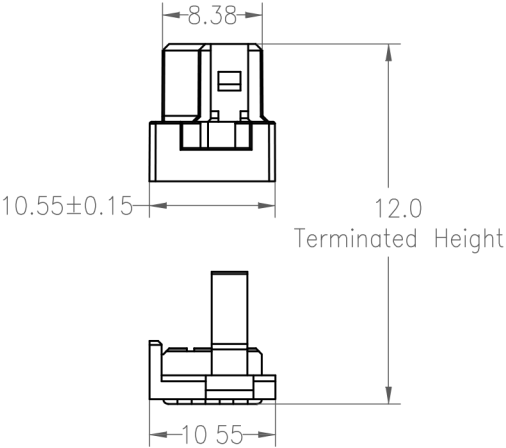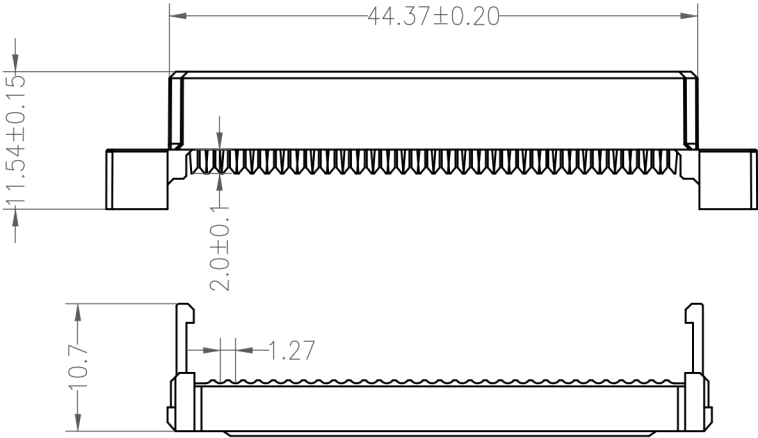

Old Part No.:DINSI-F332SW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	DIN 41612 3-R IDC TYPE				頁數 Page	1/1
品號 PART NO.	5DINIS3CNF-32S0WAB01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN087-RR455	版本 REV.	B	核對 CHECKED	Jason 2018/05/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/05/08	
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		