

SPECIFICATION

Current Rating:3.0AMP

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1000V AC for one minute




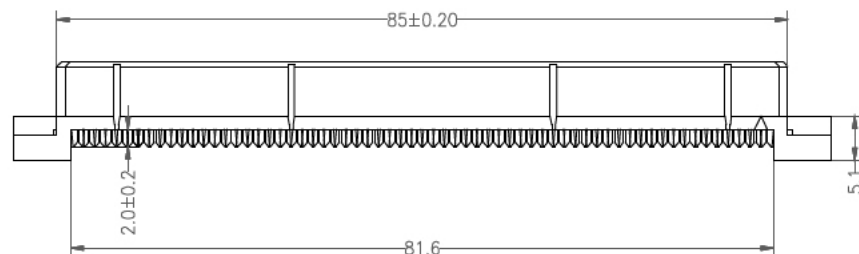
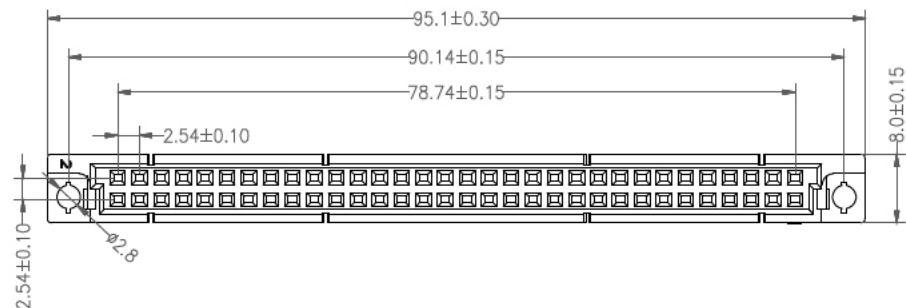
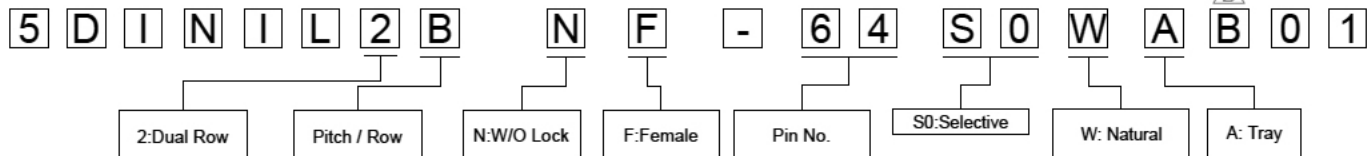
Contact Resistance: 30mΩ Max.

Temperature Range: -40°C to +105°C

MATERIAL

Material: P.B.T , UL94V-0

Contact: Phosphor Bronze

ORDER INFORMATION

Bessure
www.bessure.com Mob:+86 136 3177 3595

品名 TITLE	DIN 41612 IDC TYPE FEMALE				頁數 Page	1/1
品號 PART NO.	△ 5DINIL2BNF-64S0WAB01				繪圖 DRAWN	Benson 2020/05/04
圖號 DRAWING NO.	GN046-BN071	版本 REV.	B	核對 CHECKED	Josh 2020/05/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/05/04	
公差 TOLERANCE	.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	QEC NO:200705 Revise the drawing	Alice	2020/07/15
	ECN NO. OR DESCRIPTION	REVISED	DATE