

**SPECIFICATION**

Current Rating:3.0AMP

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1000V AC for one minute

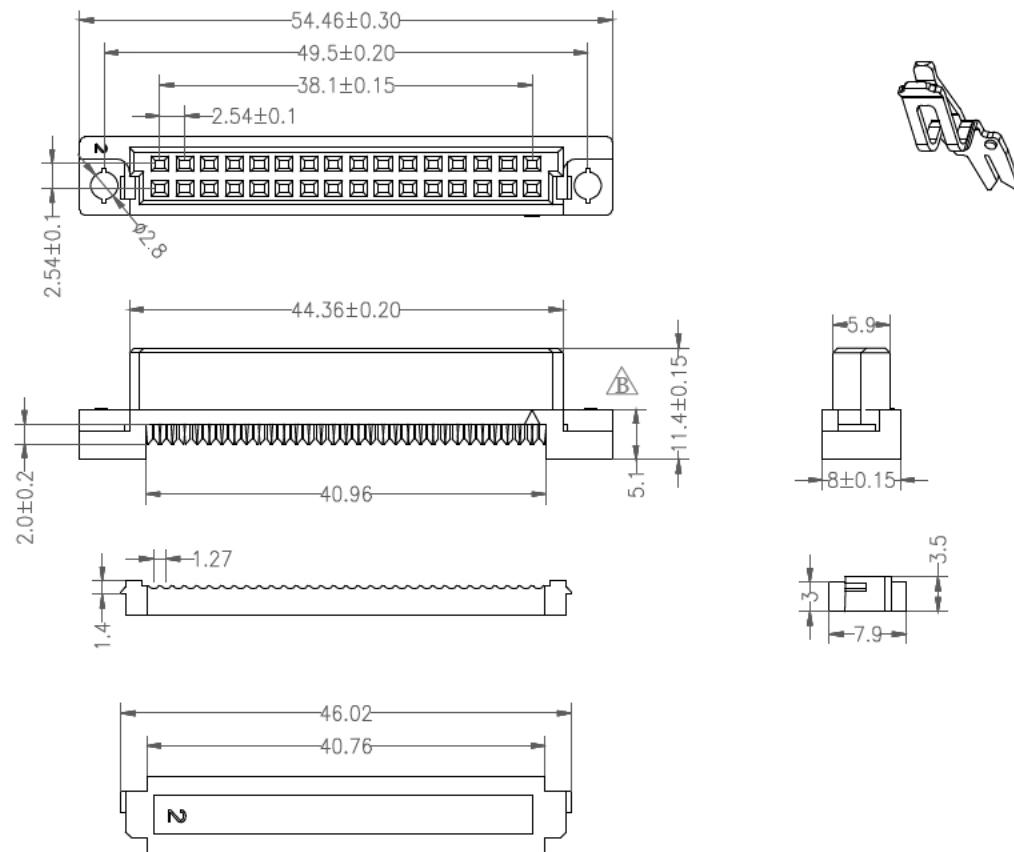
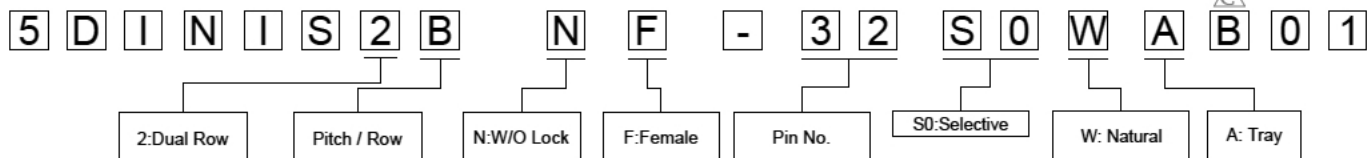
Contact Resistance: 30mΩ Max.

Temperature Range: -40°C to +105°C

**MATERIAL**

Material: P.B.T , UL94V-0

Contact: Phosphor Bronze

**ORDER INFORMATION**

**Bessure**  
www.bessure.com Mob:+86 136 3177 3585

|                      |                           |             |      |                           |                    |                      |
|----------------------|---------------------------|-------------|------|---------------------------|--------------------|----------------------|
| 品名<br>TITLE          | DIN 41612 IDC TYPE FEMALE |             |      |                           | 頁數<br>Page         | 1/1                  |
| 品號<br>PART NO.       | △ 5DINIS2BNF-32S0WAB01    |             |      |                           | 繪圖<br>DRAWN        | Benson<br>2020/05/04 |
| 圖號<br>DRAWING NO.    | GN046-BN070               | 版本<br>REV.  | C    | 核對<br>CHECKED             | Josh<br>2020/05/04 |                      |
| 客戶品號<br>CUSTOMER P/N |                           | 比例<br>SCALE | None | 承認<br>APPROVED            | Josh<br>2020/05/04 |                      |
| 公差<br>TOLERANCE      | .X ±0.20<br>.XX ±0.10     | 單位<br>UNIT  | mm   | THIRD ANGLE<br>PROJECTION |                    |                      |

|      |                                    |         |            |
|------|------------------------------------|---------|------------|
| REV. | ECN NO. OR DESCRIPTION             | REVISED | DATE       |
| △x2  | QEC NO:200705 Revise the drawing   | Alice   | 2020/07/15 |
| △x1  | QEC NO.: 200507 Revise the Drawing | Benson  | 2020/05/21 |