
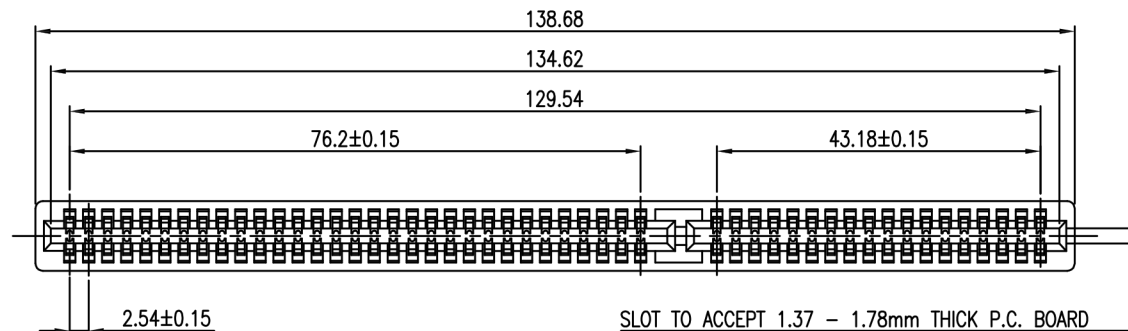



RECOMMENDED PCB LAYOUT

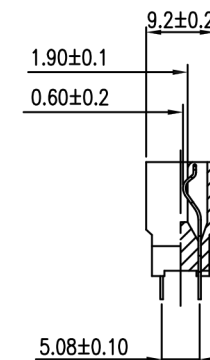

DETAIL OF KINKED

△ KINKED POSITION ARE #A2, #A3, #A24, #A25, #A28, #A29, #C16, #C17
#B2, #B3, #B24, #B25, #B28, #B29, #D16 & #D17.

MATERIAL
INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.
CONTACT: COPPER ALLOY
PLATING: MATING AREA- FLASH GOLD OVER NICKEL.
SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL
DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.
CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL
INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL
TEMPERATURE RANGE: -55° TO +105°.

			 www.bessure.com Mob:+86 136 3177 3595		品號 PART NO.		CS25B-98D		日期 DATA		2013/03/29	
					圖號 DRAWING NO.		CS25B-98D		繪圖 DRAWN		Sayid	
					客戶品號 CUSTOMER P/N				核對 APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: CARDEDGE SLOT, 2.54mm pitch		REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm	