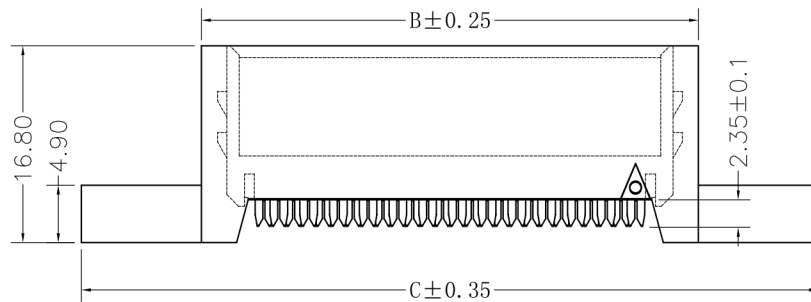
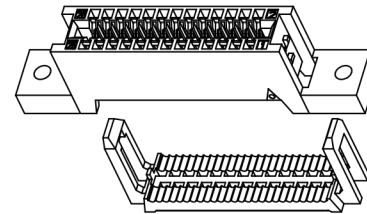
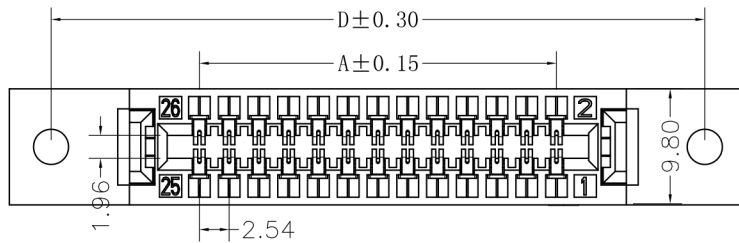


MATERIAL&FINISH

Insulator: PBT Glass Fiber(UL94V-0)
Contact : Brass
Contact : Gold-Plated Over Nickel.

SPECIFICATIONS

Current Rating :1A AC,DC
Voltage Rating : 250V AC,DC
Temperature Range:-40° C To+105° C
Contact Resistance:20MΩ Max
Insulation Resistance:1000MΩ Min
Withstanding Voltage:500V AC/Min

NUMBER OF POSITIONS	DIMENSION			
	A	B	C	D
10	10.16	22.00	42.60	35.27
14	15.24	27.08	47.68	40.35
16	17.78	29.62	50.22	42.89
20	22.86	34.70	55.30	47.97
24	27.94	39.78	60.38	53.05
26	30.48	42.32	62.92	55.59

Bessure
www.bessure.com Mob:+86 136 3177 3595

TITLE: 2.54mm Edge Card IDC type

REV. A0

PART NO.	CS25I-XXX	DRAWN	Andrew
DRAWING NO.	CS25I-XXX	CHECKED	Claudia
DATE	2014/10/09	APPROVED	Brian
TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1
		UNIT	mm