

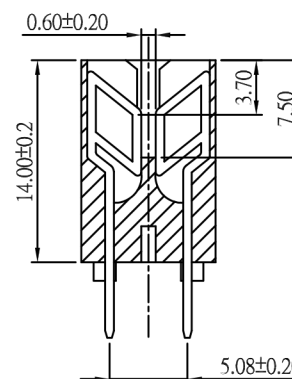
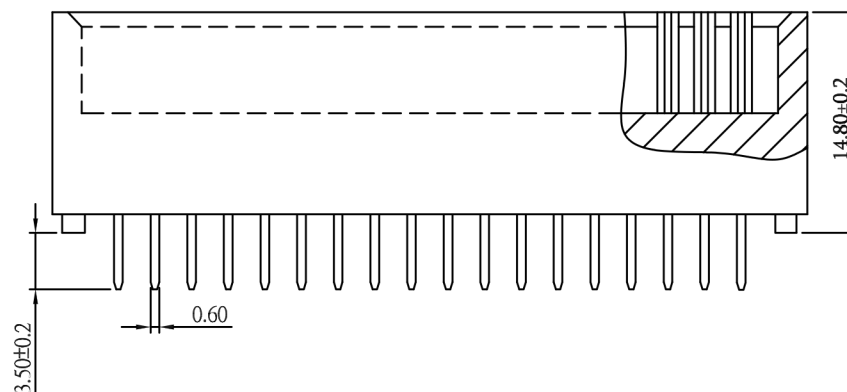


MATERIAL
INSULATOR: PBT , UL94V-0 RATED.
CONTACT: COPPER ALLOY
PLATING: FLASH GOLD OVER NICKEL.

ELECTRICAL
DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.
CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL
INSERTION FORCE: 680 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 60 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL
TEMPERATURE RANGE: -55° TO +105°.

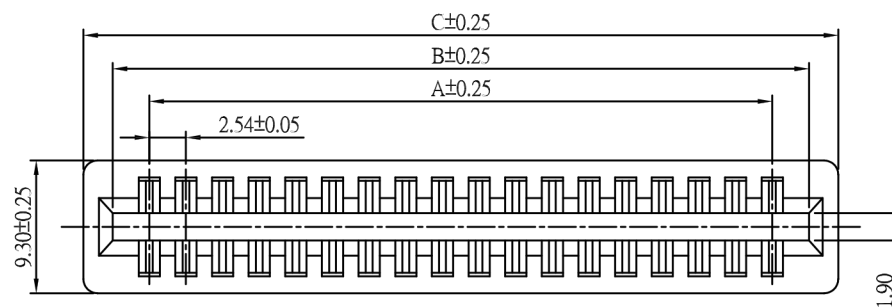

Recommended PCB Layout
(PCB TOLERANCE±0.05)

Circuits	A	B	C
4	2.54	8.12	11.68
6	5.08	10.66	14.22
8	7.62	13.20	16.76
10	10.16	15.74	19.30
12	12.70	18.28	21.84
14	15.24	20.82	24.38
16	17.78	23.36	26.92
18	20.32	25.90	29.46
20	22.86	28.44	32.00
22	25.40	30.98	34.54
24	27.94	33.52	37.08
26	30.48	36.06	39.62
28	33.02	38.60	42.16
30	35.56	41.14	44.70
32	38.10	43.68	47.24
34	40.64	46.22	49.78
36	43.18	48.76	52.32
38	45.72	51.30	54.86
40	48.26	53.84	57.40
42	50.80	56.38	59.94
44	53.34	58.92	62.48
46	55.88	61.46	65.02
48	58.42	64.00	67.56
50	60.96	66.54	70.10
52	63.50	69.08	72.64
54	66.04	71.62	75.18
56	68.58	74.16	77.72
58	71.12	76.70	80.26
60	73.66	79.24	82.80
62	76.20	81.78	85.34
64	78.74	84.32	87.88
66	81.28	86.86	90.42
68	83.82	89.40	92.96
70	86.36	91.94	95.50
72	88.90	94.48	98.04

			 www.bessure.com Mob:+86 136 3177 3595		品號 PART NO.		CSSA-XX		日期 DATA		2013/03/29	
					圖號 DRAWING NO.		CSSA-XX		繪圖 DRAWN		Sayid	
					客戶品號 CUSTOMER P/N				核對 APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: CARDEDGE SLOT, 2.54mm pitch		REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm	