

NOTES:

Current Rating: 1.5A AC,DC

Voltage Rating: 40V DC

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC for 1 minute

Temperature Range: -55°C ~ +85°C







Insulator: Nylon 66+30% GF, UL94V-0

Shell: Steel, Ni or Sn plating

Contact: Brass

Screws: Brass or Steel, Nickel plating

ORDER INFORMATION

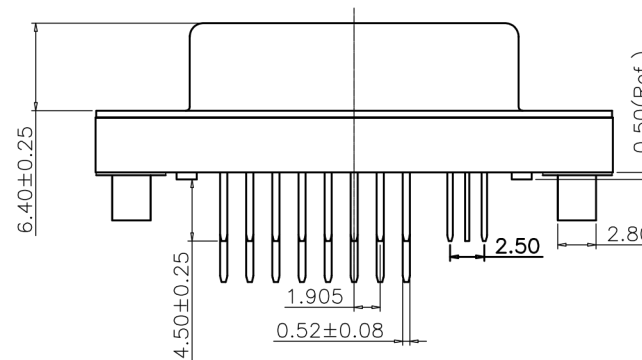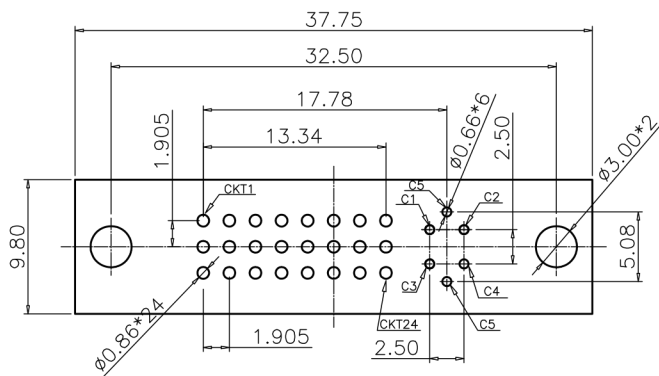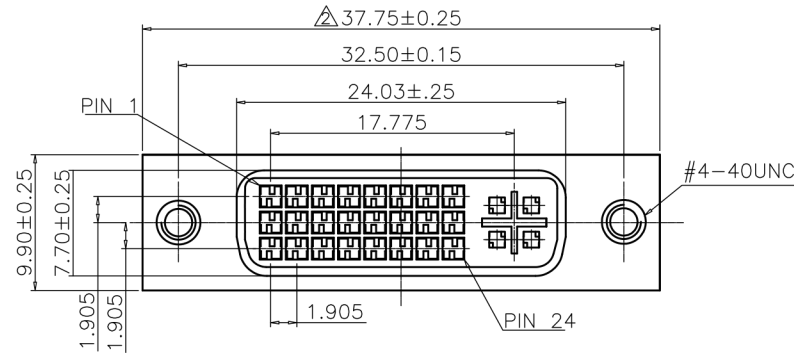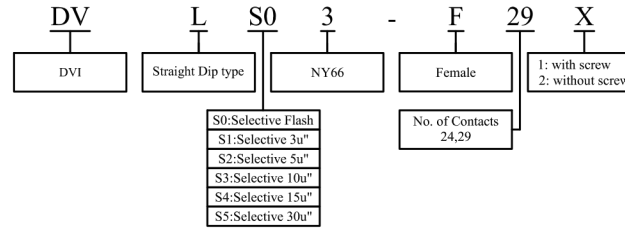

PART NO.	DVLS03-F29X	DRAWN	Andrew
DRAWING NO.	DVLS03-F29X	APPROVED	Brian
		DATE	2013/11/19

TITLE:	DVI Straight Dip Type 29Pin	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	NONE	UNIT	mm	NO.	REV.	REVISION	DATE
--------	-----------------------------	------	----	-----------	-----------------------	-------	------	------	----	-----	------	----------	------