

Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

RoHS



Contact Material:Phosphor Bronze
 Contact Plating: Sn Over Ni
 Insulator Material:High Temperature
 Plastic UL94V-0 Nylon46

ORDER INFORMATION



MM M H - F XX

SMT Type

No. of Contacts
(04~20)

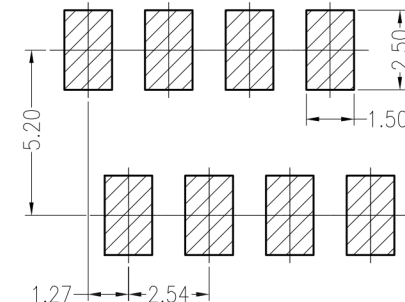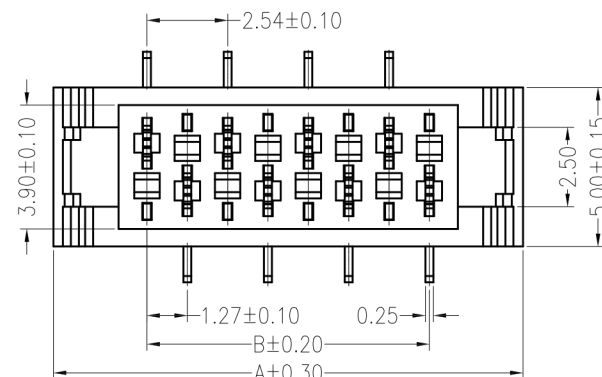

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

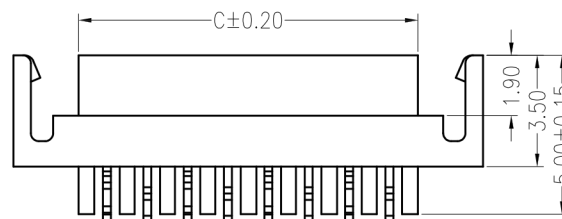

Circuit	Dimension		
	A	B	C
04	9.70	3.81	5.60
06	12.24	6.35	8.14
08	14.78	8.89	10.68
10	17.32	11.43	13.22
12	19.86	13.97	15.76
14	22.40	16.51	18.30
16	24.94	19.05	20.84
18	27.48	21.59	23.38
20	30.02	24.13	25.92

			 www.bessure.com Mob:+86 136 3177 3595		品號 PART NO.		MMMH-FXX		日期 DATA		2008/08/13	
					圖號 DRAWING NO.		MMMH-FXX		繪圖 DRAWN		Sayid	
					客戶品號 CUSTOMER P/N				核對 APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: Micro Match Socket 180° SMT With Latch		REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm	