

Rated Current:1.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating: Sn Over Ni
Insulator Material:High Temperature
Plastic UL94V-0 Nylon46






ORDER INFORMATION


MM R - F XX

Right Angle	No. of Contacts (04~20)
-------------	----------------------------

Circuit	Dimension		
	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92

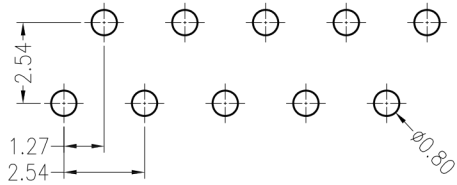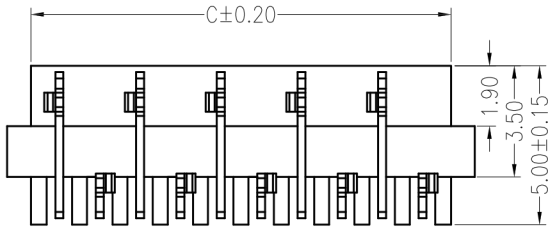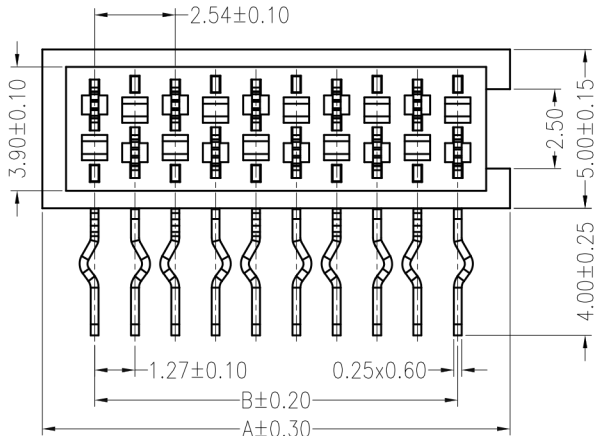

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



			 www.bessure.com Mob:+86 136 3177 3595		品號 PART NO.	MMR-FXX		日期 DATA	2008/08/13	
					圖號 DRAWING NO.	MMR-FXX		繪圖 DRAWN	Sayid	
					客戶品號 CUSTOMER P/N			核對 APPROVED	Max	
REV.	DESCRIPTION	DATA	TITLE: Micro Match Socket 90° DIP Without Latch	REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm