

Specifications

Current Rating: 3A AC,DC
Contact Resistance: 13mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Temperature Range: -55℃ ~ +105℃

Material

Insulator: P.B.T, UL94V-0
Contact: Copper Alloy

ORDER INFORMATION

V

D-SUB Type

C

Crimp Type

1

RoHS + P.B.T

-

F

Female

XX

No. of Contacts

X


N:Nickel Shell
T:Tin Shell

X




A:Non Accessories
B:Front Rivet #4-40, Height=4.0
C:Front Rivet M3, Height=4.0
D:Rear Rivet #4-40, Height=4.0
E:Rear Rivet M3, Height=4.0

X

W:White Insulator
B:Black Insulator

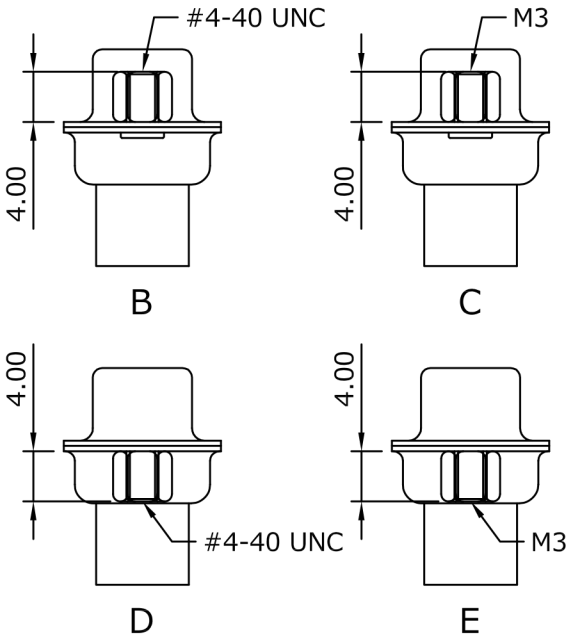

Positions	A	B	C	D
9	30.81	24.99	16.33	19.23
15	39.14	33.32	24.66	27.56
25	53.04	47.04	38.38	41.28
37	69.32	63.50	54.84	57.33

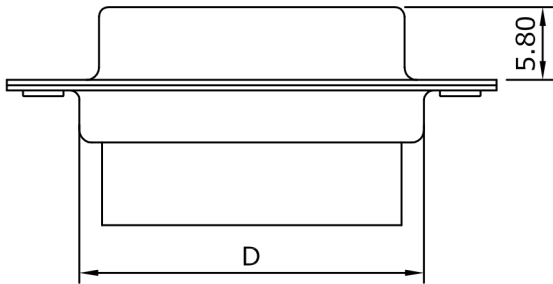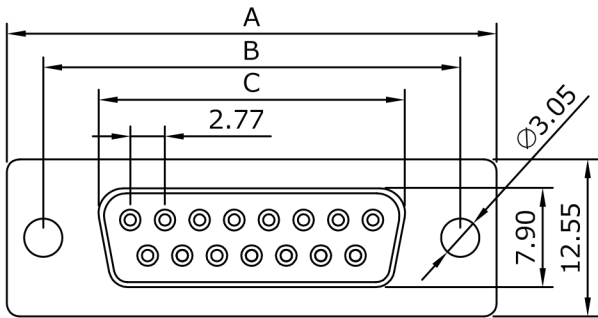

			 www.bessure.com Mob:+86 136 3177 3595		品號 PART NO.		VC1-FXXXXXX		日期 DATA		2009/10/18	
					圖號 DRAWING NO.		VC1-FXXXXXX		繪圖 DRAWN		Sayid	
					客戶品號 CUSTOMER P/N				核對 APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: D-SUB Crimp Type		REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm	