

Specifications

Current Rating: 1A AC,DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/minute
Temperature Range: -40°C ~ +105°C

Material

Insulator: Nylon 6T, UL94V-0
Contact: Copper Alloy

ORDER INFORMATION

J

M

21

X

2

-

XX

X

SMT Type


Pitch
1.27x2.54mm

RoHS + NY 6T


No. of Contacts

Y:Tray
T:Tube
P:Cap+Tube
R:Cap+Reel

G0:Gold Flash	S0:Selective Flash
G1:Gold 3u"	S1:Selective 3u"
G2:Gold 5u"	S2:Selective 5u"
G3:Gold 10u"	S3:Selective 10u"
G4:Gold 15u"	S4:Selective 15u"
G5:Gold 30u"	S5:Selective 30u"

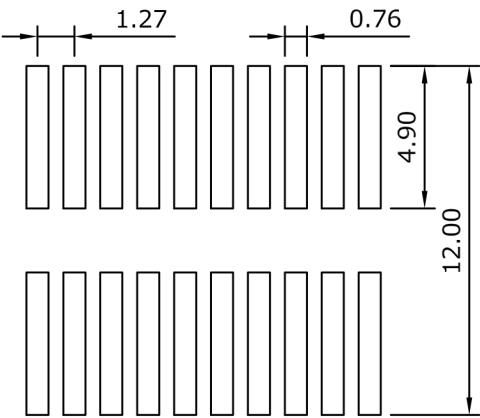

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

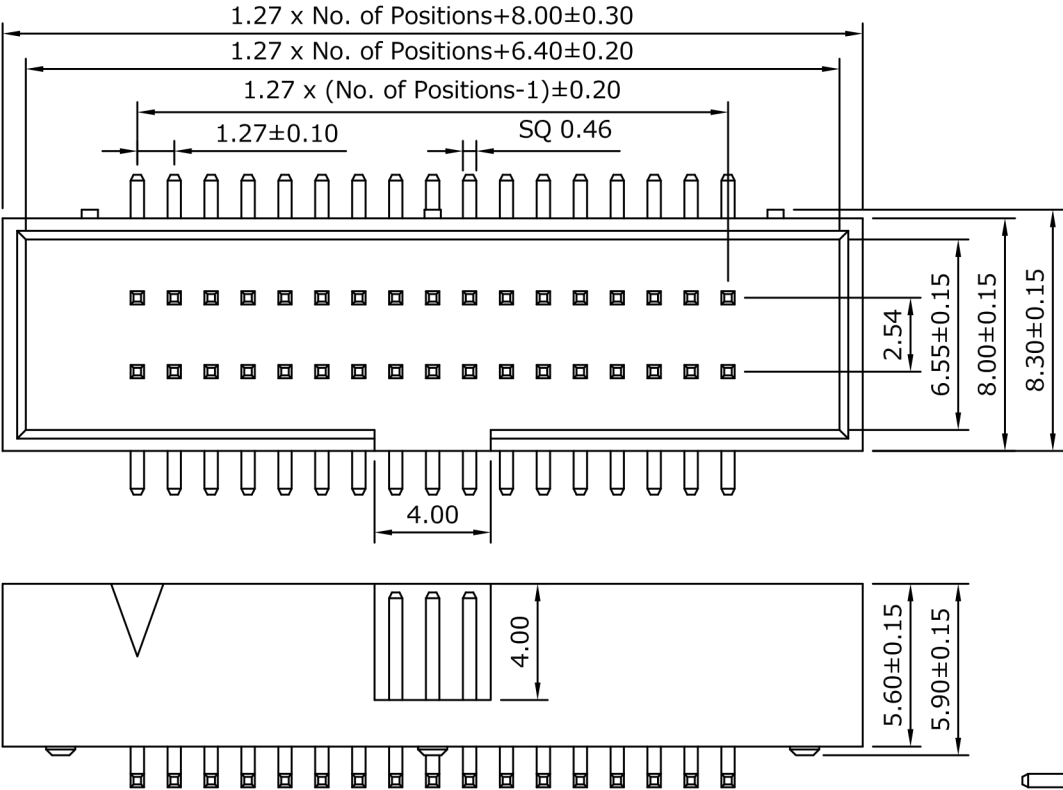

			 www.bessure.com Mob:+86 136 3177 3595			品號 PART NO.		JM21X2-XXX		日期 DATA		2007/09/20	
						圖號 DRAWING NO.		JM21X2-XXX		繪圖 DRAWN		Sayid	
						客戶品號 CUSTOMER P/N				核對 APPROVED		Max	
REV.	DESCRIPTION	DATA	TITLE: Box Header 1.27x2.54mm			REV. A	公差 TOLERANCE	.X ±0.25 .XX ±0.20	比例 SCALE	FREE	單位 UNIT	mm	